ARON LIGHT

TECHNICAL INFORMATIONS

# WYN

# 30W 4000K LUMINÁRIA

Luminária de suspensão com design moderno de dupla emissão de luz (40% superior e 60% inferior). Iluminação uniforme (270° de feixe de luz).
Suspended luminaire with modern dual-light design (40% upwards and 60% downwards). Uniform illumination environment (270° beam light).
Luminaria colgante con diseño moderno de doble luz (40% superior y 60% inferior). Luminancia uniforme (haz de luz de 270°).

## ILAR-00654

| REFERENCE | |
|---|---|
| Reference | ILAR-00654 |
| Led Type | SMD |
| Mounting Type | Suspended |
| Body Material | Aluminium |
| Housing Colour | White RAL9016 |
| Body Shape | Rectangle |
| Nominal Lifetime (EOL end of life) | 50.000H |
| Dimmable | NO |

| DIMENSION & WEIGHT | |
|---|---|
| Lenght | 900mm |
| Width | 150mm |
| Height | 19mm |
| Weight | 2.86 |
| Cutout | - |
| Packaging Unit | 6pcs/carton |
| Gross Weight | 18.6kg |
| Volume | 125x43.5x23cm |

| PHOTOMETRICAL DATA | |
|---|---|
| Total Luminous Flux | 2400lm |
| Luminous Efficacy | 80lm/w |
| Beam Angle | 270° |
| Colour Temperature | 4000K |
| Colour Rendering Index | >80 |
| Colour Consistency | <=6 |
| UGR | - |

| ELECTRICAL AND OPERATING DATA | |
|---|---|
| Nominal Wattage | 30W |
| Nominal Voltage | 200-240V |
| Operating Frequency | 50Hz |
| Power Factor | ≥0.9 |
| Operating Temperature | -20°C to +45°C |
| Starting Time 100% ON | 0.0001s |
| ON/OFF Cycles | 100.000 |

| ENERGY LABEL & STANDARDS | |
|---|---|
| Energy Label | - |
| Energy Consumption KWH/1000H | - |
| Type of Protection | IP40 |
| Protection Class | I |
| Protecion Class IK (shock resistence) | - |

| CERTIFICATIONS | |
|---|---|
| 2014/30/EU (EMC Directive) | YES |
| 2014/35/EU (LVD Directive) | YES |
| ROHS | YES |
| ENEC | - |
| Warranty | 3 YEARS |

## SIZE

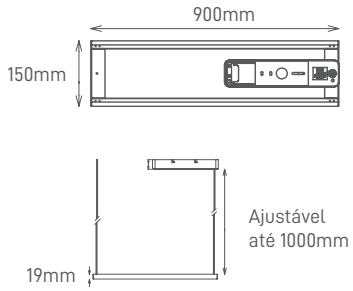


## BEAM ANGLE




## LIGHT




Designed by Aronlight in Portugal Made in PRC

Aronlight | Estrada Outurela 131A
Telefone: +351 215 846 905 - 2790-118 Carnaxide, Portugal
www.aronlight.com
geral@aronlight.pt