

## TECHNICAL INFORMATIONS

# HALE

## 10W 2700K BRANCO

Luminária de encastrar, de elevada eficiência (100lm/W) com design requintado, lente prismática, sistema de arrefecimento inteligente, corpo ajustável de 5° e feixe de luz de 36°.

Recessed, high efficiency luminaire (100lm/W) with refined design. Prismatic light and intelligent cooling system with 5° adjustable body and 36°.

Luminaria empotrable de alta eficiencia (100lm/W) con diseño refinado, lente prismática y un sistema de enfriamiento inteligente, cuerpo ajustable de 5° y ángulo de apertura de 36°.




### ILAR-00659


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00659	Lenght	Ø91.5mm	Total Luminous Flux	850
Led Type	COB	Width	-	Luminous Efficacy	85lm/w
Mounting Type	Recessed	Height	61mm	Beam Angle	36°
Body Material	Aluminium	Weight	0.26	Colour Temperature	2700K
Housing Colour	White RAL9016	Cutout	84mm	Colour Rendering Index	>80
Body Shape	Round	Packaging Unit	48pcs/carton	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	14kg	UGR	-
Dimmable	NO	Volume	46x46x29.5cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	10W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP40	ROHS	YES
Power Factor	≥0.9	Protection Class	II	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

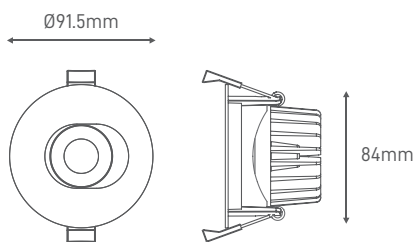

### BEAM ANGLE



Designed by Aronlight in Portugal. Made in PRC

