

## TECHNICAL INFORMATIONS


# JAZ QUADRADO

## 25W 4000K BRANCO

Painel de encastrar quadrado com design ultra fino, elevado nível de proteção (IP54), elevada eficiência (110Lm/W) e um nível de encadeamento muito baixo (UGR <16).

Ultra thin square downlight design, with high protection level (IP54), high efficiency (110Lm/W) and a very low glaring level (UGR <16).

Downlight cuadrado con diseño ultra fino, con alto nivel de protección (IP54), alta eficiencia (110Lm/W) y un nivel muy bajo de deslumbramiento (UGR <16).

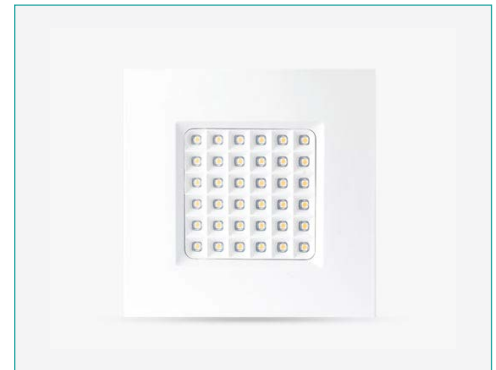


### ILAR-00687


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00687	Lenght	228mm	Total Luminous Flux	2900lm
Led Type	SMD	Width	228mm	Luminous Efficacy	116lm/w
Mounting Type	Recessed	Height	43.5mm	Beam Angle	90°
Body Material	Aluminium+PC	Weight	0.84	Colour Temperature	4000k
Housing Colour	White RAL9016	Cutout	200-210mm	Colour Rendering Index	>80
Body Shape	Square	Packaging Unit	20pcs/carton	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	18kg	UGR	19
Dimmable	NO	Volume	53x49x35cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	25W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	AC100-277V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP54	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Proteccion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

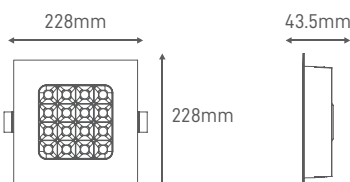

### BEAM ANGLE



Designed by Aronlight in Portugal. Made in PRC

