

## TECHNICAL INFORMATIONS

### LEV

## 15W 4000K BRANCO

Downlight saliente de design minimalista, proteção (IP54) aliada ao elevado PF (>0.9) e Baixo THD (<20%) fazem da linha Lev um preferido para qualquer projetista.

Surface downlight with minimalist design, the high protection (IP54) combined with the high PF (>0.9) and Low THD (<20%) make the Lev series a favorite for any designer.

Downlight saliente con diseño minimalista, el alto nivel de protección (IP54) combinado con el alto PF (>0.9) y bajo THD (<20%) hacen de la línea Lev un favorito para cualquier proyectista.



### ILAR-00696

#### REFERENCE

Reference	ILAR-00696
Led Type	CITIZEN COB
Mounting Type	Surface mounted
Body Material	Aluminum
Housing Colour	White RAL9016
Body Shape	Round
Nominal Lifetime (EOL end of life)	50.000H
Dimmable	NO

#### DIMENSION & WEIGHT

Lenght	Ø90mm
Width	-
Height	100mm
Weight	0.52
Cutout	-
Packaging Unit	24pcs/carton
Gross Weight	14.5kg
Volume	50x38x29cm

#### PHOTOMETRICAL DATA

Total Luminous Flux	1500
Luminous Efficacy	100lm/w
Beam Angle	60°
Colour Temperature	4000K
Colour Rendering Index	>80
Colour Consistency	<=6
UGR	-

#### ELECTRICAL AND OPERATING DATA

Nominal Wattage	15W
Nominal Voltage	200-240V
Operating Frequency	50Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.0001s
ON/OFF Cycles	100.000


#### ENERGY LABEL & STANDARS

Energy Label	-
Energy Consumption KWH/1000H	-
Type of Protection	IP54
Protection Class	I
Proteccion Class IK (shock resistance)	-


#### CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
ENEC	-
Warranty	3 YEARS

#### SIZE

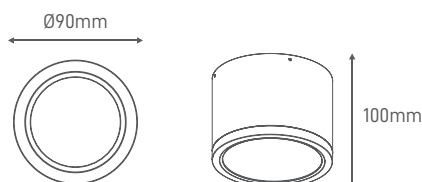

#### BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC

