

## TECHNICAL INFORMATIONS

### LEV

## 15W 4000K PRETO

Downlight saliente de design minimalista, proteção (IP54) aliada ao elevado PF (>0.9) e Baixo THD (<20%) fazem da linha Lev um preferido para qualquer projetista.

Surface downlight with minimalist design, the high protection (IP54) combined with the high PF (>0.9) and Low THD (<20%) make the Lev series a favorite for any designer.

Downlight saliente con diseño minimalista, el alto nivel de protección (IP54) combinado con el alto PF (>0.9) y bajo THD (<20%) hacen de la línea Lev un favorito para cualquier proyectista.




#### ILAR-00699

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00699	Lenght	Ø90mm	Total Luminous Flux	1500
Led Type	CITIZEN COB	Width	-	Luminous Efficacy	100lm/w
Mounting Type	Surface mounted	Height	100mm	Beam Angle	60°
Body Material	Aluminum	Weight	0.52	Colour Temperature	4000K
Housing Colour	Black RAL9005	Cutout	-	Colour Rendering Index	>80
Body Shape	Round	Packaging Unit	24pcs/carton	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	14.5kg	UGR	-
Dimmable	NO	Volume	50x38x29cm		


  

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	15W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP54	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

#### SIZE

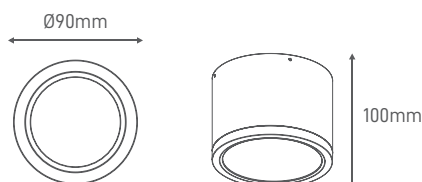

#### BEAM ANGLE

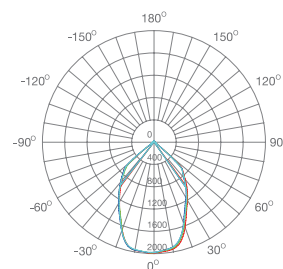

Designed by Aron Light in Portugal. Made in PRC

