



TECHNICAL INFORMATIONS


LYNX LUMINÁRIA PRISMÁTICO

40W 3000K 5700K

Luminária Linear Led (refletor tipo A e difusor tipo B), possibilidade de mudança de temperatura de cor por DIP Switch, permite um instalação suspensa ou de superfície.

Led Linear Luminaire (reflector type A and diffuser type B), color temperature switchable by DIP switch for Suspended or surface installation.

Luminaria Lineal Led (reflector tipo A y difusor tipo B), posibilidad de cambio de temperatura de color por DIP Switch, permite una instalación suspendida o de superficie.

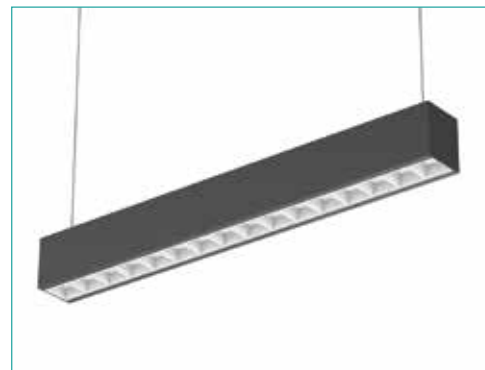


ILAR-01036

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01036	Length	1204mm	Total Luminous Flux	4400-4800lm
Led Type	SMD	Width	60mm	Luminous Efficacy	110-120lm/w
Mounting Type	Surface Mounted / Suspended	Height	70mm	Beam Angle	100°
Body Material	Aluminum	Weight	2.2	Colour Temperature	3000K 4000K 5700K
Housing Colour	Black RAL 9005	Cutout	-	Colour Rendering Index	>80
Body Shape	Linear	Packaging Unit	6pcs/carton	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	20kg	UGR	19
Dimmable	NO	Volume	125.5x23x17cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	40W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP20	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

SIZE

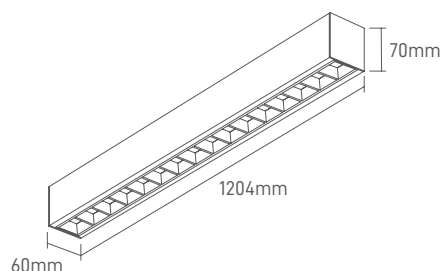

BEAM ANGLE

Designed by Aron Light in Portugal. Made in PRC

