



## TECHNICAL INFORMATIONS


# FLEXI

## 5W CCT BRANCO

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5000K), design elegante. Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5000K), stylish design. Ideal for locations where flexibility of adapting environment/color is required.


Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5000K), diseño elegante. Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.

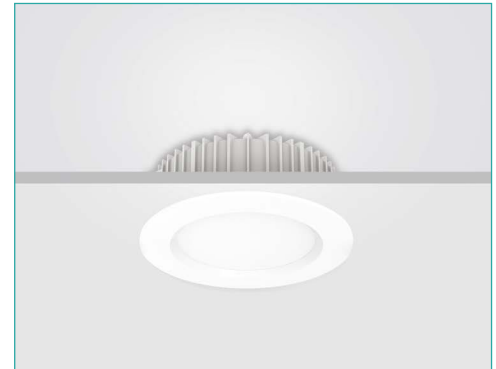

### ILAR-01574

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01574	Lenght	Ø96mm	Total Luminous Flux	500lm
Led Brand	Smalite	Width	-	Luminous Efficacy	100lm/w
Mounting Type	Recessed	Height	28mm	Beam Angle	120°
Body Material	PC+Aluminum	Cut-out	Ø85mm	Colour Temperature	3000K-4000K-5000K
Housing Colour	White RAL9016	Packaging Unit	100pcs/carton	Colour Rendering Index	>80
Body Shape	Round	Gross Weight	-	Colour Consistency	-
Nominal Lifetime (EOL end of life)	30.000H			UGR	<23
Dimming Options	1-10V / DALI (Optional)			Flicker-free	YES
ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	5W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP44	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	ENEC	-
Operating Temperature	-20°C to +45°C	Proteccion Class IK (shock resistance)	IK03	Warranty	3 YEARS
Starting Time 100% ON	0.5s				
ON/OFF Cycles	>15000				

### SIZE

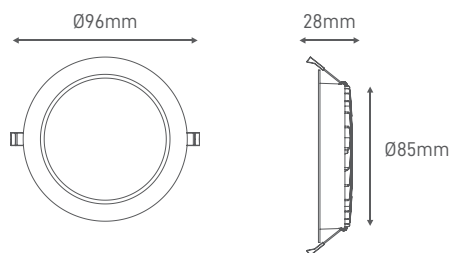

Designed by Aronlight in Portugal. Made in PRC

