

## TECHNICAL INFORMATIONS


# LYNX LUMINÁRIA FOSCO

## 20W 3000K 4000K 5700K

Luminária Linear Led (refletor tipo A e difusor tipo B), possibilidade de mudança de temperatura de cor por DIP Switch, permite um instalação suspensa ou de superfície.

Led Linear Luminaire (reflector type A and diffuser type B), color temperature switchable by DIP switch for Suspended or surface installation.


Luminaria Lineal Led (reflector tipo A y difusor tipo B), posibilidad de cambio de temperatura de color por DIP Switch, permite una instalación suspendida o de superficie.

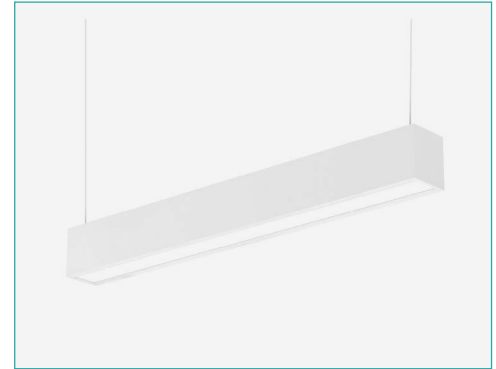

### ILAR-01664

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01664	Lenght	604mm	Total Luminous Flux3000K	2000lm/w
Led Type	SMD	Width	60mm	Total Luminous Flux4000K	2200lm/w
Mounting Type	Surafce Mounted /Suspneded	Height	70mm	Total Luminous Flux5700K	2400lm/w
Body Material	Aluminum	Weight	-	Luminous Efficacy	110-120lm/w
Housing Colour	White RAL 9016	Cutout	-	Beam Angle	100°
Body Shape	Linear	Packaging Unit	6pcs/carton	Colour Temperature	3000K 4000K 5700K
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	10kg	Colour Rendering Index	>80
Dimmable	NO	Volume	75.5x23x17cm	Colour Consistency	<=6
				UGR	<19
ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	20W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP20	ROHS	YES
Power Factor	≥0.9	Protection Class	Class I	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	IK03	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

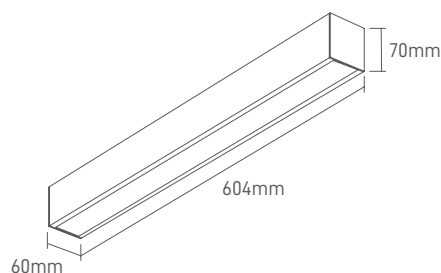

Designed by Aronlight in Portugal. Made in PRC

