

TECHNICAL INFORMATIONS

LYNX EVO

36W 3CCT

Modular aluminum luminaire with an elegant design.
Luminária modular de alumínio com design elegante.
Luminaria modular de aluminio con un diseño elegante.




ILAR-02250

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02250	Lenght	1200mm	Total Luminous Flux	4500lm
Mounting Type	Pendant/Surface/Trimless	Width	55mm	Luminous Efficacy	125lm/w
Body Material	Aluminum	Height	75mm	Beam Angle	120°
Housing Colour	Black RAL 9005	Cut-out	-	Colour Temperature	3CCT 3000K-4000K-5700K
Body Shape	Rectangular	Packaging Unit	4pcs/carton	Colour Rendering Index	>80
Lifetime	60000H				
Dimmable	Optional (TRIAC/DALI/1-10V)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	36W	Type of Protection	IP20	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Protection Class	Class II	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK03	ROHS	YES
Power Factor	≥0.9			Warranty	3 YEARS
Operating Temperature	-20°C to +45°C				
Starting Time 100% ON	0.5s				
Group Connection	MAX. 1000W				

SIZE

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)

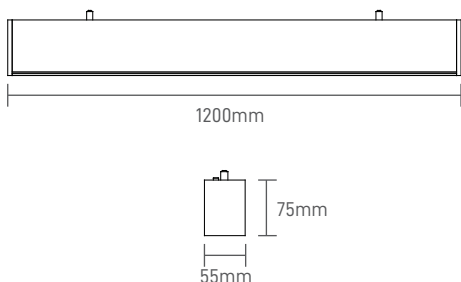

L Connector
8W Opal
Black: ILAR-02254

120° L Connector
8W Opal
Black: ILAR-02256

T Connector
10W Opal
Black: ILAR-02258

120° Y Connector
10W Opal
Black: ILAR-02260

X Connector
12W Opal
Black: ILAR-02262



1500mm Trimless KIT
ILAR-02263
1200mm Trimless KIT
ILAR-02264
600mm Trimless KIT
ILAR-02265



Suspension KIT
2.5m
ILAR-02266



Connection/
Suspension Plate
ILAR-02267

Designed by Aronlight in Portugal. Made in PRC

