

TECHNICAL INFORMATIONS

KAYA 120LM/W

15W 4000K 60CM

Luminária de Design Slim com eficiência de 120Lm/W e Fator Potência >0.96, Proteção IP20 e tempo de vida de 30.000H (3 anos garantia).

Slim Design Light with efficiency of 120Lm / W and Power Factor > 0.96, IP20 protection and 30.000H life time (3 years warranty).

Luminaria de Diseño Slim con eficiencia de 120Lm / W y Factor Potencia > 0.96, Protección IP20 y tiempo de vida de 30.000H (3 años garantía).



ILAR-00773

REFERENCE

| | |
|------------------------------------|--------------------|
| LED Type | SMD |
| LED Brand | Epistar LED |
| Body Material | PC+Aluminum inside |
| Fixings | - |
| Housing Colour | White |
| Nominal Lifetime (EOL end of life) | 30.000hrs |
| Dimmable | No |

DIMENSION & WEIGHT

| | |
|----------------|-------------------|
| Dimensions | 600mm |
| Weight | 71.5mm |
| Volume | 32mm |
| Packaging Unit | Carton Box 20 pcs |
| Gross Weight | 11 kg |
| Volume | 0.05cbm |

PHOTOMETRICAL DATA

| | |
|------------------------|---------|
| Total Luminous Flux | 1800lm |
| Luminous Efficacy | 120lm/W |
| Beam Angle | 120° |
| Colour Temperature | 4000K |
| Colour Rendering Index | 80 |

ELECTRICAL AND OPERATING DATA

| | |
|-----------------------|--------------------|
| Nominal Wattage | 15W |
| Nominal Voltage | 100-240V |
| Operating Frequency | 50/60Hz |
| Operating Temperature | - 20° C to + 40° C |
| starting Time 100% ON | 0.0001 s |
| ON/OFF Cycles | >100000 |


ENERGY LABEL & STANDARS

| | |
|--|----------|
| Energy Label | A+ |
| Energy Consumption KWH/1000H | - |
| Type of Protection | IP20 |
| Protection Class | Class II |
| Protection Class IK (shock resistance) | IK08 |


CERTIFICATIONS

| | |
|----------------------------|---------|
| 2014/30/EU (EMC Directive) | YES |
| 2014/35/EU (LVD Directive) | YES |
| ROHS | YES |
| ENEC | - |
| CE | YES |
| Warranty | 3 YEARS |

SIZE

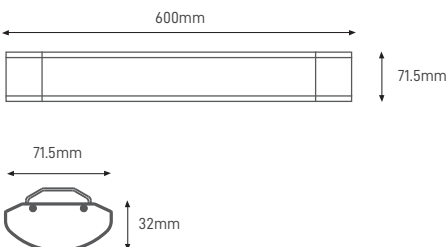

BEAM ANGLE

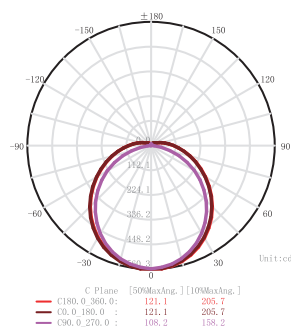

Designed by Aron Light in Portugal. Made in PRC

