



TECHNICAL INFORMATIONS

ATEX LINEARTOP

60W 1.2M 5000K



ILAR-02853

REFERENCE

Body Material	Aluminum alloy (ADC12)
Backup battery	Li-ion battery, 12W power

DIMENSION & WEIGHT

Dimensions	1200x125x100mm
------------	----------------

PHOTOMETRICAL DATA

Total Luminous Flux	7200lm
Luminous Efficacy	120lm/W
Beam Angle	120°
Colour Temperature	5000K

ELECTRICAL AND OPERATING DATA


Nominal Wattage	60W
Nominal Voltage	100-277V
Operating Frequency	50/60Hz
Operating Temperature	- 10° C to + 45° C
Power Factor	>0.97

ENERGY LABEL & STANDARS


IP Protection	IP66
Protection Class IK (shock resistance)	IK10

CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
CE	YES
Warranty	5 YEARS



SIZE

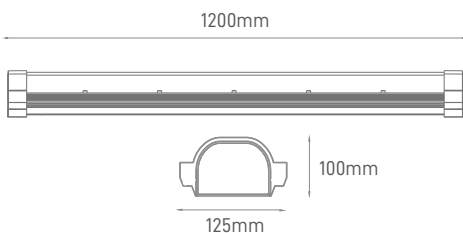

ATEX RATED LIFTING AND HANDLING EQUIPMENT



ATEX HAZARDOUS GAS ENVIRONMENTS: ZONE 1



ATEX HAZARDOUS DUST ENVIRONMENTS: ZONE 21



ATEX HAZARDOUS DUST ENVIRONMENTS: ZONE 22

Designed by Aronlight in Portugal. Made in PRC

