



TECHNICAL INFORMATIONS

ATEX LINEARTOP


80W 1.2M 5000K




ILAR-02854

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Body Material	Aluminum alloy (ADC12)	Dimensions	1200x125x100mm	Total Luminous Flux	11200lm
Backup battery	Li-ion battery, 12W power			Luminous Efficacy	140lm/W
				Beam Angle	120°
				Colour Temperature	5000K

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	80W	IP Protection	IP66	2014/30/EU (EMC Directive)	YES
Nominal Voltage	100-277V	Protection Class IK (shock resistance)	IK10	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz			ROHS	YES
Operating Temperature	- 10° C to + 45° C			CE	YES
Power Factor	>0.97			Warranty	5 YEARS

 II 2 G Ex eb mb IIC T5 Gb
II 2 D Ex tb IIIC T75 °C D

SIZE

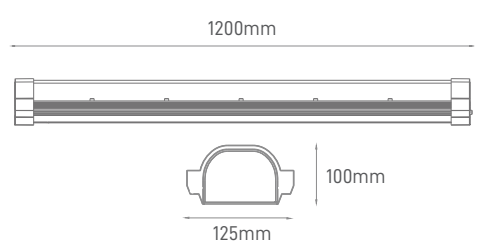

ATEX RATED LIFTING AND HANDLING EQUIPMENT



ATEX HAZARDOUS GAS ENVIRONMENTS: ZONE 1



ATEX HAZARDOUS DUST ENVIRONMENTS: ZONE 21



ATEX HAZARDOUS DUST ENVIRONMENTS: ZONE 22

Designed by Aronlight in Portugal. Made in PRC

