

TECHNICAL INFORMATIONS

FONTE DE ALIMENTAÇÃO

150W 24V DIMÁVEL

Fonte de Alimentação Dimável 24V - Fita LED IP20


LED Dimmable Power Supply 24V - LED Strip IP20

Fuentes Regulable 24V - Tiras LED IP20

ILAR-01177



OUTPUT		DIMENSION & WEIGHT		INPUT	
Reference	ILAR-01177	Lenght	287mm	Voltage range	87-264VAC
DC voltage	24V	Width	50mm	Frequency range	50HZ
Rated Current	6.25A	Height	30mm	Efficiency (Typ)	82%
Current Range	0-6.3A	Weight	0.590kg	AC current (Typ)	1.4A/220V
Rated Power	150W	Cutout	-	Surge current (Typ)	Cold Start: 65A/230VAC
Ripple and Noise (Max) Note.2	240mVp-p	Packaging Unit	1	Current leak	<2mA/240VAC
Voltage adjustment	22-27.6V	Gross Weight	-		
Voltage Accuracy Note3	±1%	Volume	-		
Linear Adjustment Note4	±0.5%				
Load Adjustment Note5	±0.5%				
Start and rise time	1000ms, 30ms/230VAC				
Hold time (Typ)	50ms/230VAC				
Dimmable	0-10V				
PROTECTION		ENVIRONMENT		SAFETY REG. & EMC (NOTE. 6)	
Overload	Larger than 105% of capacity	Working Temperature	-20~+60°C	Safety regulation	GB195110.1-2004
Overvoltage	Protection type: Shut down O/P voltage, re-power on to recover	(Refer to the tenuation curve)			IEC61347-1:2003
Overheat	-	Working humidity	20-90% RH, without condense		CE (EMC+LVD)
Warranty	3 Years	Storage temp & hmdty	-40~+80°C	Voltage proof	I/P-O:1.5KVAC
Surge Protection	1~1.5KV	Temp. coefficient	±0.03%/0°C (0-50°C)		I/P-FG:1.5KVAC
		Vibration proof	10-500HZ, 5G 10min / Cycle, X, Y, Z axes 60 min each		O/P-FG:0.5KVAC
				Insulation resistance	I/P-O/P, I/P-FG,O/P-FG:100M OHMS/500VDC/25°/70% RH
				EMC irradiation	EN 55032A:2006; EN61000-3-2:1995+A2:2005
				EMC disturbance proof	EN 61000-3-2:2006
SIZE					

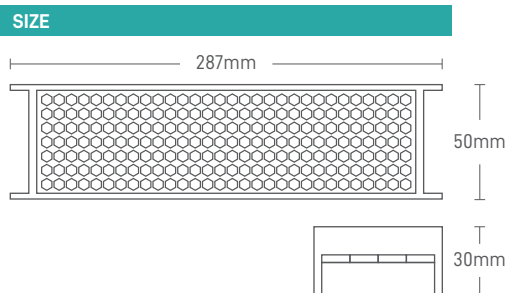

Designed by Aronlight in Portugal. Made in PRC

