

TECHNICAL INFORMATION

SIRIUS

40W 5000K

Luminária de Parede, com opção de ajuste de 270° e alta eficiência de iluminação de 135LM / W, ideal para Fachadas de Indústrias, Comércio e Residências.

Slim Wall Pack Light with an 270° adjustment choice and high lighting efficiency of 135LM / W, ideal for industrial, commercial and residential facades.

Luminaria de Pared con una opción de ajuste de 270° y alta eficiencia de 135LM / W, Ideal para fachadas industriales, comerciales y residenciales.




ILAR-00514

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00514	Lenght	232mm	Total Luminous Flux	4800lm
Led Type	SMD	Width	132mm	Luminous Efficacy	120lm/W
Body Material	Aluminium	Height	144mm	Beam Angle	60°
Housing Colour	Black	Weight	2.02Kg	Colour Temperature	5000K
Nominal Lifetime (EOL end of life)	50000H	Weight	2.6Kg	Colour Rendering Index	70
Mounting Type	NO	Packaging Unit	4pcs	Colour Consistency	-
Dimmable	NO	Gross Weight (kg)	10.1kg	UGR	-
Sensor	NO	Volume (cbm)	0.047cbm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	40W	Energy Label	A+	ERP	NO
Nominal Voltage	100-240V	Energy Consumption KWH/1000H	-	UL	YES
Operating Frequency	50-60Hz	Type of Protection	IP65	GE	NO
Power Factor	>0.9	Protection Class	-	CE	YES
Operating Temperature	-20°C to 45°C	Proteccion Class IK (shock resistance)	-	2014/30/EU (EMC Directive)	YES
Drive	DYM			2014/35/EU (LVD Directive)	YES
ON/OFF Cycles	-			ROHS	YES
				ENEC	NO
				Warranty	5 YEARS

SIZE

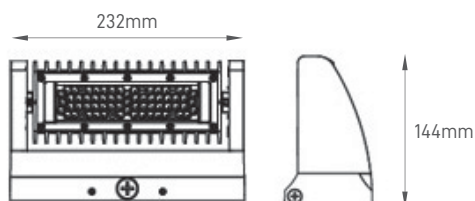

BEAM ANGLE

Designed by Aron Light in Portugal. Made in PRC

