

TECHNICAL INFORMATIONS

CONVERT

60W 4000K

Luminária de rua multifuncional com elevada durabilidade e performance (150lm/W).

Multifunctional Street Luminaire with high durability and performance (150lm/W).

Luminaria viaria multifuncional con elevada durabilidade y rendimiento (150lm/W).


ILAR-01795



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Model	ILAR-01795	Dimensions	400x81mm	Total Luminous Flux	9000lm
LED Type	SMD 3030	Packaging Unit	1 pc	Luminous Efficacy	150lm/W
Body Material	Die Cast Aluminium	Gross Weight (kg)	9.4kg	Beam Angle	Multiple
Housing Colour	RAL 9005	Luminaire Net Weight	6.8kg	Colour Temperature	4000K
Nominal Lifetime	89.000H - L80	EPA	0.11m ²	Colour Rendering Index	Ra70 (Ra80 Optional)
Dimiing Options	DALI / 1-10V	Fixation Type	Multiple		
Sensor	Optional				
Socket Type	Optional (NEMA/Zhaga)				

ELECTRICAL AND OPERATING DATA		CERTIFICATIONS	
Nominal Wattage	60W	CE	YES
Nominal Voltage	220-240V	2014/30/EU (EMC Directive)	YES
Operating Frequency	50-60Hz	2014/35/EU (LVD Directive)	YES
Power Factor	>0.94	ROHS	YES
Electrical Class	Class I or Class II	ENEC	YES
Operating Temperature	-30°C to + 50°C		
Surge Protection	6kV, 10kV		
IP Rating	IP66		
IK Rating	IK09		

BEAM ANGLE

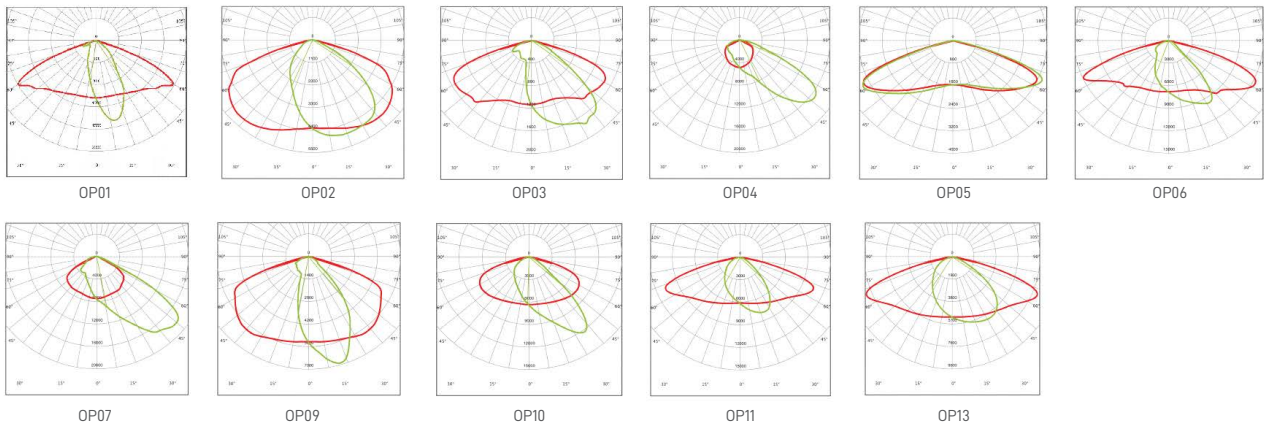


TECHNICAL INFORMATIONS


MOUNTING OPTIONS




DIMENSIONS

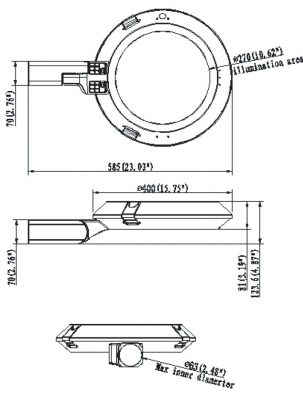


Side Entry

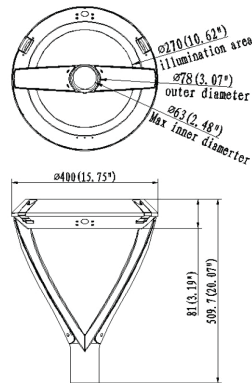


Twin Strut

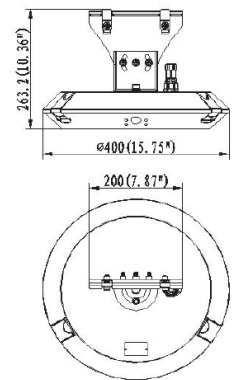


Suspension

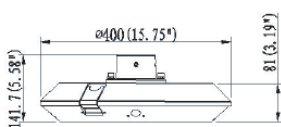

Gooseneck

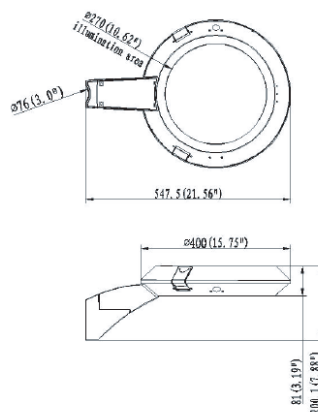

Straight-arm

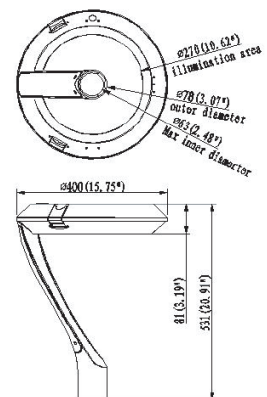

Single Strut