

TECHNICAL INFORMATION

CAMPÂNULA COBALT

120W-150W-200W 3CCT

Campânula Cobalt, com elevada eficiência lumínica (180 lm/W) e apta a ser controlada por sensor Zhaga. Com "Power/CCT switch", oferece uma variedade de combinações de potência/temperatura de cor adaptada a qualquer situação.

Cobalt Campanula, with high luminous efficiency (180 lm/W) and suitable to be controlled by Zhaga sensor. With "Power/CCT switch," it offers a variety of power/color temperature combinations tailored to any situation.

Campânula Cobalt, con elevada eficiencia lumínica (180 lm/W) y apta para ser controlada por sensor Zhaga. Con interruptor de "Power/CCT", ofrece una variedad de combinaciones de potencia/temperatura de color adaptadas a cualquier situación.



ILAR-02206

REFERENCE

Reference	ILAR-02206
Body Material	Aluminium Alloy
Housing Colour	Ral 9007 Grey
Mounting Type	Loop hanging
	Ceiling Mounting
Sensor	Optional(Zhaga)

DIMENSION & WEIGHT

Lenght	Ø325mm
Height	140mm
Packaging Unit	1 pcs
Gross Weight (kg)	3.5kg

PHOTOMETRICAL DATA

Total Luminous Flux	21600lm-36000lm
Luminous Efficacy	180lm/W
Beam Angle	90°
Colour Temperature	3CCT 3000K/4000K/5000K
Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA

Nominal Wattage	120W-150W-200W
Nominal Voltage	220-240VAC
Operating Frequency	50-60Hz
Power Factor	>0.95
Operating Temperature	-30°C to 50°C


ENERGY LABEL & STANDARS

Type of Protection	IP65
Electrical Class	Class I
Protecion Class IK (shock resistance)	IK08


CERTIFICATIONS

CE	YES
Warranty	5 YEARS


SIZE

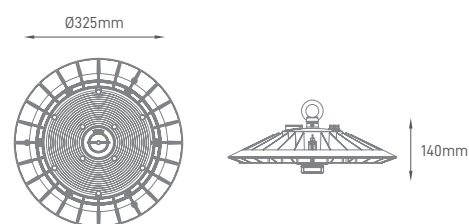

BEAM ANGLE



80W-120W Beam Angle



150W-200W Beam Angle

Designed by Aron Light in Portugal Made in PRC

