



## TECHNICAL INFORMATIONS

# PAINEL SUPERFÍCIE QUADRADO

## 24W 3000K BRANCO

Panel de Encastrar e Superfície, ideal para tectos falsos com altura limitada.

Recessed and Surface Panel, ideal for dropped ceiling with limited height.

Panel de Encastrar y Superfície, ideal para techos falsos con altura limitada.


**ILAR-00091**



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type	SMD	Width	300x300mm	Total Luminous Flux	2100lm
Mounting Type	Surface	Height	35mm	Luminous Efficacy	90lm/w
Body Material	Aluminium	Weight	0.995kg	Beam Angle	120°
Housing Colour	White			Colour Temperature	3000k
Body Shape	Square			Colour Rendering Index	>80
LGP	PS			Colour Consistency	<= 6
Nominal Lifetime (EOL end of life)	25000hrs				
LED Brand	Samsung LED				
Useful Lifetime Based on LM70	-				
Dimmable	No				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	24W	Energy Label	A+	2014/30/EU (EMC Directive)	YES
Nominal Voltage	85-265V	Energy Consumption KWH/1000H	24kwh	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP44	ROHS	YES
Power Factor	0.7	Protection Class	Class II	Warranty	2 YEARS
Operating Temperature	- 20° C to + 40° C	Protection Class IK (shock resistance)	IK03		

### SIZE

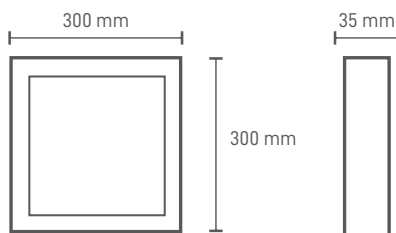

Designed by Aron Light in Portugal. Made in PRC

