ARON LIGHT

TECHNICAL INFORMATIONS

# PAINEL COMPACT LED 60X60 40W 5500K BRANCO

Painel branco com design discreto, uma combinação perfeita de elegância e simplicidade.

White panel with smooth design, a perfect combination of elegance and simplicity.

Panel blanco de líneas suaves, una perfecta combinación entre elegancia y simplicidad.

**ILAR-00922**

## REFERENCE

| | |
|---|---|
| Led Type | SMD |
| Mounting Type | Recessed |
| Body Material | Aluminium |
| Housing Colour | White |
| Body Shape | Square |
| LGP | GA40 |
| Nominal Lifetime (EOL end of life) | 15000h |
| Useful Lifetime Based on LM80 | 10000h |
| Useful Lifetime Based on LM70 | 12000h |
| Dimmable | No |

## DIMENSION & WEIGHT

| | |
|---|---|
| Lenght | 595mm |
| Width | 595mm |
| Height | 10mm |
| Weight | - |
| Cut-Out | - |

## PHOTOMETRICAL DATA

| | |
|---|---|
| Total Luminous Flux | 3600 lm |
| Luminous Efficacy | 90 lm/W |
| Beam Angle | 120° |
| Colour Temperature | 5500K |
| Colour Rendering Index | 80 |
| Colour Consistency | <= 10 |
| UGR | <21 |

## ELECTRICAL AND OPERATING DATA

| | |
|---|---|
| Nominal Wattage | 40W |
| Nominal Voltage | 200-240V |
| Operating Frequency | 50/60Hz |
| Power Factor | 0.9 |
| Operating Temperature | - 10° C to + 40° C |

## ENERGY LABEL & STANDARDS

| | |
|---|---|
| Energy Label | A+ |
| Energy Consumption KWH/1000H | - |
| Type of Protection | IP44 |
| Protection Class | II |
| Protecion Class IK (shock resistence) | IK03 |

## CERTIFICATIONS

| | |
|---|---|
| 2014/30/EU (EMC Directive) | YES |
| 2014/35/EU (LVD Directive) | YES |
| ROHS | YES |
| Warranty | 2 YEARS |

## SIZE

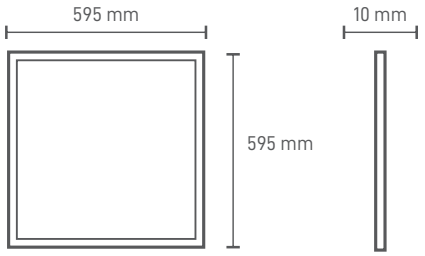


## BEAM ANGLE




## ACCESSORIES

| | |
|---|---|
| Model | Recessed Mounting Kit |
| SKU | ILAR-00333 |
| Size | 0 |
| Cut-Out | 0 |
| Material | Aluminium |

Designed by Aron Light in Portugal Made in PRC

Aron Light | Praceta das Gaias, 1 e 2
Telefone: +351 215 846 905 - 2610-081 Alfragide Amadora, Portugal
www.aronlight.pt
geral@aronlight.pt