

## TECHNICAL INFORMATIONS

# PAINEL ENCASTRAR REDONDO

## 9W 4000K BRANCO

Panel de Encastrar e Superfície, ideal para tectos falsos com altura limitada.

Recessed and Surface Panel, ideal for dropped ceiling with limited height.

Panel de Encastrar y Superfície, ideal para techos falsos con altura limitada.

**ILAR-01221**



### REFERENCE

Led Type	SMD
Mounting Type	Recessed
Body Material	Aluminium
Housing Colour	White
Body Shape	Round
LGP	PS
Nominal Lifetime (EOL end of life)	25000hrs
LED Brand	Samsung LED
Useful Lifetime Based on LM70	-
Dimmable	No

### DIMENSION & WEIGHT

Lenght	Ø150mm
Width	Ø150mm
Height	20mm
Weight	0.145kg
Cut-Out	Ø135mm

### PHOTOMETRICAL DATA

Total Luminous Flux	710lm
Luminous Efficacy	83lm/w
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>80
Colour Consistency	<= 6

### ELECTRICAL AND OPERATING DATA

Nominal Wattage	9W
Nominal Voltage	85-265V
Operating Frequency	50/60Hz
Power Factor	0.5
Operating Temperature	- 20° C to + 40° C


### ENERGY LABEL & STANDARS

Energy Label	A+
Energy Consumption KWH/1000H	9kwh
Type of Protection	IP44
Protection Class	II
Protection Class IK (shock resistance)	-

### CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	2 YEARS

### SIZE

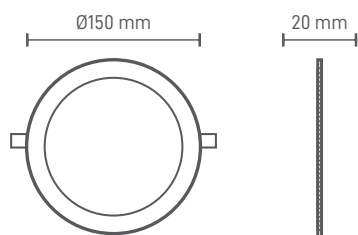

Designed by Aron Light in Portugal. Made in PRC

