



TECHNICAL INFORMATION

PAINEL BACKLIT 30X120

35W 3CCT BRANCO

Panel IP65 com switch 3CCT: Resistente à poeira e à água, com alta eficácia (150lm/W) e baixo UGR (<19). Ideal para ambientes industriais e hospitalares, proporcionando durabilidade e garantindo iluminação confiável em condições adversas.

IP65 Panel with 3CCT switch: Dust and water-resistant, high efficiency (150lm/W), and lowUGR (<19). Ideal for industrial and healthcare settings, ensuring reliable lighting in adverse conditions.


Panel IP65 con interruptor 3CCT: Resistente al polvo y al agua, alta eficiencia (150lm/W) y bajo nivel de UGR (<19). Ideal para entornos industriales y hospitalarios, garantizando iluminación confiable en condiciones adversas.



ILAR-02161

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02161	Lenght	1195mm	Total Luminous Flux	5250 lm
Body Material	Aluminium	Width	295mm	Luminous Efficacy	150 lm/w
Housing Finish	White RAL9003	Height	30mm	Beam Angle	90°-100°
Lens material	PMMA			Colour Temperature	3CCT Switch
Diffuser material	Microprismatic PS				3000K/4000K/5000K
Mounting Type	Recessed			Colour Rendering Index	≥80
Driver	ON-OFF			Photobiological risk	RG0
				UGR	<19
ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	35W	Type of Protection(IP)	IP65 (Panel and driver)	CE	YES
Nominal Voltage	AC220-240V	Type of Protection(IK)	IK03	2014/35/EU LVD	YES
Operating Frequency	50/60Hz	Protecion Class	Class II	2014/30/EU EMC	YES
Operating Temperature	-10° C to + 45° C			Warranty	5 YEARS
Nominal Lifetime	50000h				
Power Factor	≥0,9				

SIZE

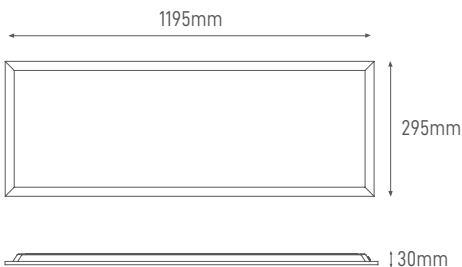

Designed by Aron Light in Portugal. Made in PRC

