



TECHNICAL INFORMATIONS

RECESSED ROUND PANEL

18W 3CCT WHITE

Panel de Encastrar e Superfície, ideal para tectos falsos com altura limitada.

Recessed and Surface Panel, ideal for dropped ceiling with limited height.

Panel de Encastrar y Superficie, ideal para techos falsos con altura limitada.


ILAR-02810



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type	SMD	Lenght	Ø223mm	Total Luminous Flux	1630lm
Mounting Type	Recessed	Height	18mm	Luminous Efficacy	90lm/w
Body Material	Aluminium	Weight	0.36kg	Beam Angle	120°
Housing Colour	White	Cut-Out	Ø206mm	Colour Temperature	3CCT 3000K/4000K/6500K
Body Shape	Round			Colour Rendering Index	>80
LGP	PS			Colour Consistency	<= 6
Nominal Lifetime (EOL end of life)	25000hrs				
LED Brand	Samsung LED				
Useful Lifetime Based on LM70	-				
Dimmable	No				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	18W	Energy Label	E	2014/30/EU (EMC Directive)	YES
Nominal Voltage	176-264V	Energy Consumption KWH/1000H	18kwh	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP44	ROHS	YES
Power Factor	0.7	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	- 20° C to + 40° C				

SIZE

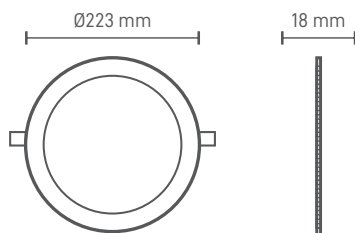

Designed by Aronlight in Portugal. Made in PRC

