

TECHNICAL INFORMATIONS

LED FLOODLIGHT TECH II

1000W 5000K

Série profissional de projetores IP66 de alta intensidade, com corpo em alumínio fundido de alta condutividade térmica.

Professional series of high lumen IP66 projectors, with high thermal conductivity cast aluminum body.

Serie profesional de proyectores IP66 de alta intensidad, con cuerpo de fundición de aluminio de alta conductividad térmica.




ILAR-01959


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01959	Size Piece	520x612x406.5mm	Total Luminous Flux	160000lm
Led Type	SMD 2835/3030	Luminaire Net Weight	24±0.5kg	Luminous Efficacy	160Lm/W
Lens Material	PC Optical Lens			Beam Angle	OP30
Body Material	Die Cast Aluminium			Colour Temperature	5000K
Body Colour	Grey			Colour Rendering Index	≥70
Nominal Lifetime	100000H (L70B50)				
Dimmable	Optional (1-10V/DALI)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARDS		CERTIFICATIONS	
Nominal Wattage	1000W	Type of Protection	IP66	2014/30/EU (EMC Directive)	YES
Nominal Voltage	AC100-277V	Protecion Class IK (shock resistance)	IK08	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz			ROHS	YES
Power Factor	>0,95			CE	YES
Operating Temperature	-40° C to + 50° C			Warranty	5 YEARS
Electrical Class	Class I or Class II				
Surge Protection	10kV				

SIZE

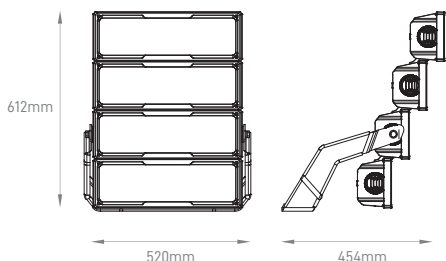

BEAM ANGLE

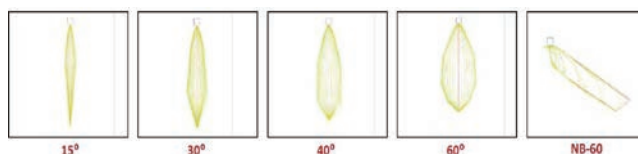

Designed by Aronlight in Portugal. Made in PRC

