

TECHNICAL INFORMATIONS

LED FLOODLIGHT TECH II

1000W 5000K

Série profissional de projetores IP66 de alta intensidade, com corpo em alumínio fundido de alta condutividade térmica.

Professional series of high lumen IP66 projectors, with high thermal conductivity cast aluminum body.

Serie profesional de proyectores IP66 de alta intensidad, con cuerpo de fundición de aluminio de alta conductividad térmica.



ILAR-02004

REFERENCE

Reference	ILAR-01959
Led Type	SMD 2835/3030
Lens Material	PC Optical Lens
Body Material	Die Cast Aluminium
Body Colour	Grey
Nominal Lifetime	100000H (L70B50)
Dimmable	Optional (1-10V/DALI)

DIMENSION & WEIGHT

Size Piece	520x612x406.5mm
Luminaire Net Weight	24±0.5kg

PHOTOMETRICAL DATA

Total Luminous Flux	135000lm
Luminous Efficacy	135Lm/W
Beam Angle	NP-P60
Colour Temperature	5000K
Colour Rendering Index	≥70

ELECTRICAL AND OPERATING DATA

Nominal Wattage	1000W
Nominal Voltage	AC100-277V
Operating Frequency	50/60Hz
Power Factor	>0,95
Operating Temperature	-40° C to + 50° C
Electrical Class	Class I or Class II
Surge Protection	10kV


ENERGY LABEL & STANDARDS

Type of Protection	IP66
Protection Class IK (shock resistance)	IK08


CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
CE	YES
Warranty	5 YEARS

SIZE

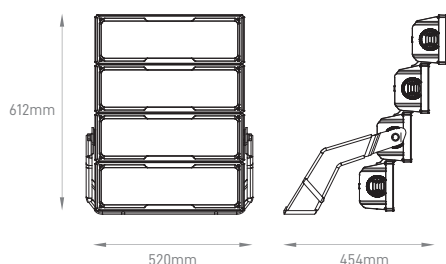

BEAM ANGLE

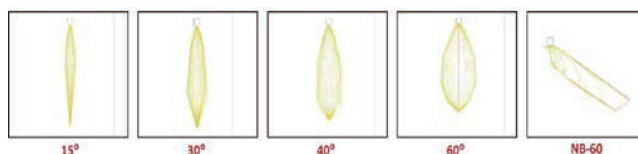

Designed by Aronlight in Portugal. Made in PRC

