

## TECHNICAL INFORMATIONS

# LINEAR WALL WASHER RL5-24

## 24W RGB+CCT

Luminária de fachada, com RGB+CCT e controlo RF à distância. Apresenta um alto índice de protecção (IK08, IP66).

Facade luminaire, with RGB+CCT and remote RF control. It features a high protection index (IK08, IP66).

Luminaria de fachada, con RGB+CCT y control remoto RF. Cuenta con un alto índice de protección (IK08, IP66).



### ILAR-02139

#### REFERENCE

Body Material	Die-Cast Aluminium
Difuser Material	Tempered Glass
Mounting Type	Wall/Bracket
Intelligent Control	YES (RF 2.4 GHz-30m)
Control	MiBoxer Remotes

#### DIMENSION & WEIGHT

Dimensions	994x36x27mm
Weight	2,5kg

#### PHOTOMETRICAL DATA

Total Luminous Flux	1600lm
Luminous Efficacy	67lm/w
Beam Angle	24°
Colour Temperature	RGB+CCT(2700K-6500K)
Colour Rendering Index	>80

#### ELECTRICAL AND OPERATING DATA

Rated Voltage	24W
Nominal Voltage	DC24V-48V
Operating Temperature	-20°C to +45°C


#### ENERGY LABEL & STANDARS

Type of Protection (IP)	IP66
Type of Protection (IK)	IK08

#### CERTIFICATIONS

CE	YES
Warranty	3 YEARS

#### SIZE

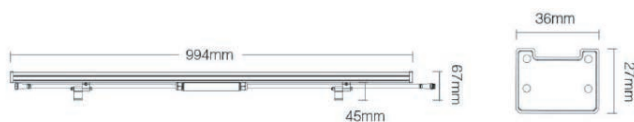

#### RECOMMENDED ACCESSORIES

- ILAR-02350 - Connection Cable 1m
- ILAR-02351 - Connection Cable "T" 1m

Designed by Aron Light in Portugal. Made in PRC

