

## TECHNICAL INFORMATIONS

# URBAN SOLAR LED


## 30W 4500K BLACK

Desempenho profissional, em alumínio fundido, anticorrosão.

Professional performance, in die-casting aluminum, anti-corrosion, anti-oxidation.

Desempenho profesional, en aluminio fundido, anticorrosión, anti-oxidación.


### ILAR-01114

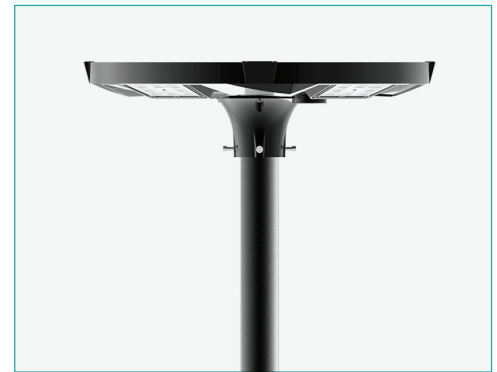


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
LED Chip	Philips Lumiled	Size	L530xW530xH146mm	Total Luminous Flux	4500lm
Body Material	Die Casting Aluminum	Packaging Unit	1	Luminous efficiency	150lm/W
Housing Colour	Black	Gross Weight	9.2Kg	Beam Angle	100°
Solar Panel	30W /18V monocrystalline silicon	Net Weight	8Kg	Colour Temperature	4500K
Lifespan of LED	>50.000H	Packing Size	L652xW602xH130mm	Colour Rendering Index	80
		Installation height	3-5M	Humidity	-
		Pole diameter	60/76/83mm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Operating time	Full power >12H, Intelligent mode 3-4 days	Energy Label	A+	CE	YES
Control Mode	Light Control + Motion Sensor	Energy Consumption KWH/1000H	-	ROHS	YES
Battery	18650 lithium battery 12V 30 Ah	Type of Protection	IP66	Warranty	5 YEARS
Sensor	Optional	Protection Class	-	Battery	3 YEARS
		Protecion Class IK (shock resistance)	-		

### SIZE

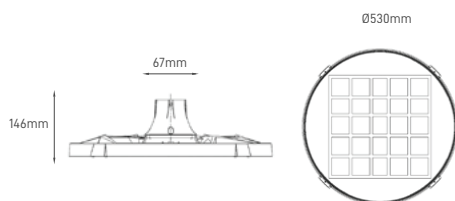

### BEAN ANGLE



Designed by Aronlight in Portugal. Made in PRC

