


TECHNICAL INFORMATIONS

SPECTRA PROJECTOR LED WITH SENSOR


50W 6000K WHITE

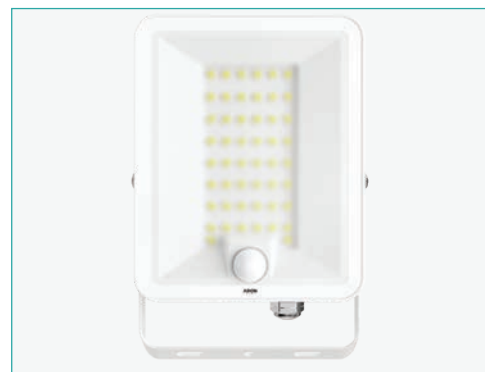

ILAR-02898

| REFERENCE | | DIMENSION & WEIGHT | | PHOTOMETRICAL DATA | |
|-------------------------------|--------------------|---------------------------------------|---------------|------------------------|---------|
| Reference | ILAR-02898 | Size Piece | 145.8x115.8mm | Total Luminous Flux | 4000lm |
| Led Type | SMD2835 | | | Luminous Efficacy | 80Lm/W |
| Body Material | Die Cast Aluminium | | | Beam Angle | 120° |
| Body Colour | White RAL 9016 | | | Colour Temperature | 6000K |
| Nominal Lifetime | 30000h | | | Colour Rendering Index | >80 |
| Dimmable | No | | | | |
| Cable Size | 50cm | | | | |
| ELECTRICAL AND OPERATING DATA | | ENERGY LABEL & STANDARS | | CERTIFICATIONS | |
| Nominal Wattage | 50W | Energy Consumption KWH/1000H | 6KWH | CE Directive | YES |
| Nominal Voltage | AC220-240V | Type of Protection | IP65 | ROHS | YES |
| ON/OFF Cycles | >15000 | Protection Class | Class I | Warranty | 3 YEARS |
| Operating Frequency | 50/60Hz | Protecion Class IK (shock resistance) | IK06 | | |
| Power Factor | >0.7 | | | | |
| Operating Temperature | - 30° C to + 40° C | | | | |
| Power Supply | DOB | | | | |
| SPD | 1KV-2KV | | | | |

SIZE



SENSOR DATA

| | |
|----------------|----------|
| Range | 4±2 m |
| Time (On) | 10±5 sec |
| Lux Level (On) | <10 lux |

Designed by Aron Light in Portugal. Made in PRC

